



USB Test Fixture (B TO A)

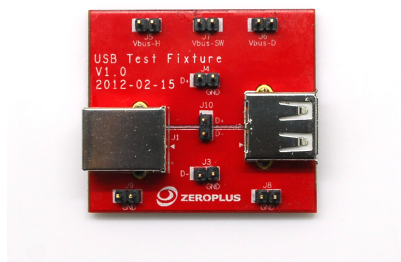

Type-B USB連接埠
連接至PC端 HOST

Type-B USB Port:
It is used to connect to
the HOST on the PC.

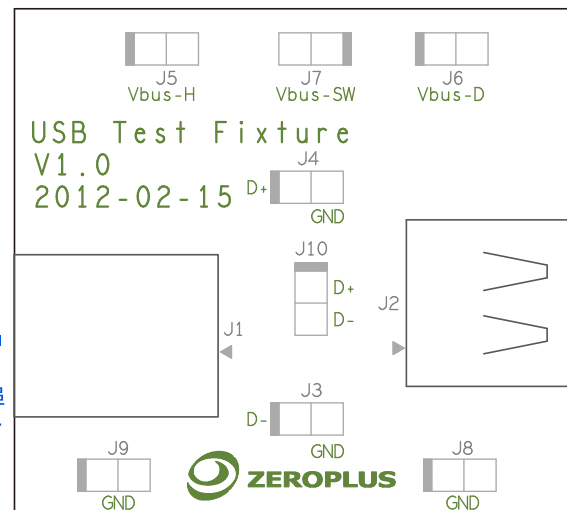

Type-A USB連接埠
連接待測物

Type-A USB Port:
It is used to connect with the DUT
(Device Under Test).

Brief Introduction

- 4.5 cm x 4 cm x 1.3cm
- For tracing USB 2.0 signal
- Accessories: USB cable x 1

	Pin 1	Pin 2	
J3	D-	GND	Through 33Ω
J4	D+	GND	Through 33Ω
J5	Type-B USB +5V		
J6	Type-A USB +5V		
J7	Type-A USB +5V	Type-B USB +5V	
J8	GND	GND	
J9	GND	GND	
J10	D+	D-	

Note: 使用時，請用Jump接上J7，讓Type-B +5V連接Type-A +5V。

During operating, connect the Jump with the J7, connect the Type-B +5V with the Type-A +5V.



孕龍科技股份有限公司 ZEROPLUS TECHNOLOGY CO., LTD.

23585新北市中和區建八路123號2樓
2F., No.123, Jian 8th Rd., Zhonghe Dist., New Taipei City 23585, Taiwan
Tel: +886-2-6620-2225 Fax: +886-2-2223-4362
Service Mail: service@zeroplus.com.tw

北京市海淀区安宁庄西路9号院(当代城市家园)13号楼D座402室
电话: +86-10-51159268 传真: +86-10-51159278

上海市浦东新区张江晨晖路825弄8号101室
电话: +86-21-50155235~6 传真: +86-21-50155235 #607

深圳市宝安82区新湖路华美居商务中心A区C座605室
电话: +86-755-29556305~6 传真: +86-755-29556306 #613

www.zeroplus.com.tw

Copyright © ZEROPLUS TECHNOLOGY CO., LTD. All Rights Reserved. 20130102